

# UNSUPERVISED SOURCE SEPARATION VIA BAYESIAN INFERENCE IN THE LATENT DOMAIN

Michele Mancusi<sup>\*1</sup>

Emilian Postolache<sup>\*1</sup>

Marco Fumero<sup>1</sup>

Andrea Santilli<sup>1</sup>

Luca Cosmo<sup>1,2</sup>

Emanuele Rodolà<sup>1</sup>

Sapienza University of Rome<sup>1</sup>  
University of Lugano<sup>2</sup>

## ABSTRACT

State of the art audio source separation models rely on supervised data-driven approaches, which can be expensive in terms of labeling resources. On the other hand, approaches for training these models without any direct supervision are typically high-demanding in terms of memory and time requirements, and remain impractical to be used at inference time. We aim to tackle these limitations by proposing a simple yet effective unsupervised separation algorithm, which operates directly on a latent representation of time-domain signals. Our algorithm relies on deep Bayesian priors in the form of pre-trained autoregressive networks to model the probability distributions of each source. We leverage the low cardinality of the discrete latent space, trained with a novel loss term imposing a precise arithmetic structure on it, to perform exact Bayesian inference without relying on an approximation strategy. We validate our approach on the Slakh dataset [1], demonstrating results in line with state of the art supervised approaches while requiring fewer resources with respect to other unsupervised methods.

**Index Terms**— Signal separation, Autoregressive generative models, Bayesian inference, Unsupervised learning

## 1. INTRODUCTION

Generative models have reached promising results in a wide range of domains, including audio, and can be used to solve different tasks in unsupervised learning. A relevant problem in the musical domain is the task of source separation of different instruments. Given the sequential nature of music and the high variability of rhythm, timbre and melody, autoregressive models [2] represent a popular and effective choice to process data on such domain, showcasing high multimodality in the modeled probability distributions. The widely

adopted WaveNet autoregressive architecture [3] works in the temporal domain. Given that audio signals are typically sampled at high frequencies (e.g. 44 kHz) for music, the choice of modeling the data distribution directly in the time domain leads to short contexts being captured by neural computations and quick saturation of memory. Nevertheless, existing unsupervised approaches for source separation operate in the time domain [4]. In order to capture longer contexts and to reduce memory burden, different quantization schemes have been introduced for autoregressive models [5, 6], where chunks in time are mapped to sequences of latent tokens belonging to a small vocabulary. OpenAI’s Jukebox [7] follows this approach and excels as an architecture that can capture very long contexts, generating highly consistent tracks. Leveraging the useful properties of this architecture, we propose a novel approach to unsupervised source separation that works directly on quantized latent domains. Our contributions can be summarized as follows:

1. We perform source separation applying exact Bayesian inference directly in the latent domain, exploiting the relative small size of the latent dictionary. We don’t rely on any approximation strategy, such as variational inference or Langevin dynamics.
2. We introduce LQ-VAE: a quantized autoencoder trained with a novel loss that imposes an algebraic structure on the discrete latent space. This allows us to alleviate noisy and distorted samples which arise from a vanilla quantization approach.

## 2. RELATED WORK

The problem of source separation has been classically tackled in an unsupervised fashion [8], where the sources to be separated from a mixture signal are unknown [9]. With the advent of deep learning, most source separation tasks applied to musical data started relying on supervised learning, training models on data with known correspondence between sources. Recently, following the success of deep generative models, there has been a renewed interest in unsupervised methods.

<sup>\*</sup> Equal contribution

© 2021 IEEE. Personal use of this material is permitted. Permission from IEEE must be obtained for all other uses, in any current or future media, including reprinting/republishing this material for advertising or promotional purposes, creating new collective works, for resale or redistribution to servers or lists, or reuse of any copyrighted component of this work in other works

## 2.1. Supervised source separation

This line of approaches aims to map high dimensional observations of audio mixtures to a smaller dimensional space and apply, explicitly or implicitly, a mask to filter the sources from the latent representation of the mixtures, in a supervised way. Most works in this context can be distinguished in *frequency domain* and *waveform domain* approaches. Frequency domain approaches [10] operate on the spectral representation of the input mixtures. This line of works has highly benefited from the incoming of deep learning techniques from simple fully connected networks [11], LSTM [12], and CNN coupled with recurrent approaches [13, 14]. Recent approaches such as [15] and [16] hold the state of the art in music source separation over the [17] dataset, by respectively extending the conditional U-net architecture of [18] to multi-source separation, and by exploiting multi-dilated convolution that applies different dilation factors in each layer to model different resolutions simultaneously. Waveform domain approaches process the mixtures directly in the time domain to overcome phase estimation, which is necessary when converting the signal from the frequency domain. The method of [19] performs in line with the state of the art by extending a WaveNet-like architecture, coupled with an LSTM in the latent space.

These state-of-the-art methods for audio source separation have limitations in that they require large amounts of labeled data to train the network.

## 2.2. Unsupervised source separation

Closer to our work, [20] proposes to leverage generative priors in the form of GANs trained on individual sources. They use projected gradient descent optimization to search in the source-specific latent spaces and effectively recover the constituent sources in the time domain. Although promising, GANs suffer from modal collapse, so their performance is limited in the musical domain, where variability is abundant. [4] proposes to use Langevin dynamics on the global log-likelihood of the audio sequences to parallelize the sampling procedure of autoregressive models used as Bayesian priors. This approach produces good results but at the cost of a high footprint in computation time requirements. This is due to the need of training distinct models for each noise level and to the costly optimization on the time domain.

Differently, our inference procedure has much lower computational and memory requirements, allowing us to efficiently run the model on a single GPU. In addition, we can perform exact Bayesian inference without relying on an approximation scheme of the posterior (e.g., its score).

## 3. BACKGROUND

In this section we report the fundamental elements of our architecture, which is inspired by [7]. The overall architecture

can be split into two parts: (i) a quantization module mapping the input sequences to a discrete latent space, and (ii) an autoregressive prior (one per source) which models the distribution of a given source in the discrete latent space.

### 3.1. Quantization module

Let us consider an input sequence  $\mathbf{x} = x_1, \dots, x_T \in [-1, 1]^T$  of length  $T$ , which represents a normalized waveform in the time domain. In order to be representative of an expressive portion of the audio sequence,  $T$  should be large. However, due to the complexity of modern neural architectures, choosing a large enough value of  $T$  is not always feasible. To reduce the dimensionality of the space one can leverage the VQ-VAE architecture [5] to map large continuous sequences in the time domain to smaller sequences in a discrete latent domain. A VQ-VAE is composed of three blocks:

- A convolutional encoder  $E : [-1, 1]^T \rightarrow \mathbb{R}^{S \times D}$ , with  $S \ll T$ , where  $S$  is the length of the latent sequence and  $D$  denotes the number of channels;
- a bottleneck block  $B = B_I \circ B_Q$  where  $B_Q : \mathbb{R}^{S \times D} \rightarrow \mathcal{C}^S \subseteq \mathbb{R}^{S \times D}$  is a vector quantizer, mapping the sequence of latent vectors  $\mathbf{h} = \mathbf{h}_1, \dots, \mathbf{h}_S = E(\mathbf{x})$  into the sequence of nearest neighbors contained in a codebook  $\mathcal{C} = \{\mathbf{e}_k\}_{k=1}^K$  of learned latent codes, and  $B_I : \mathcal{C}^S \rightarrow [K]^S$  is an indexer mapping the codes  $\mathbf{e}_{k_1}, \dots, \mathbf{e}_{k_S}$  into the associated codebook indices  $z_1 = k_1, \dots, z_S = k_S$ . Note that since  $B_I$  is bijective, the codes  $\mathbf{e}_k$  and their indices  $k$  are semantically equivalent, but we shall use the term ‘codes’ for the vectors in  $\mathcal{C}$  and ‘latent indices’ for the associated integers;
- a decoder  $D : [K]^S \rightarrow [-1, 1]^T$  mapping the discrete sequence back into the time domain.

The VQ-VAE is trained by minimizing the composite loss:

$$\mathcal{L}_{\text{VQ-VAE}} = \mathcal{L}_{\text{rec}} + \mathcal{L}_{\text{codebook}} + \beta \mathcal{L}_{\text{commit}}, \quad (1)$$

where:

$$\mathcal{L}_{\text{rec}} = \frac{1}{T} \sum_t \|x_t - D(z_t)\|_2^2 \quad (2)$$

$$\mathcal{L}_{\text{codebook}} = \frac{1}{S} \sum_s \|\text{sg}[\mathbf{h}_s] - \mathbf{e}_{z_s}\|_2^2 \quad (3)$$

$$\mathcal{L}_{\text{commit}} = \frac{1}{S} \sum_s \|\mathbf{h}_s - \text{sg}[\mathbf{e}_{z_s}]\|_2^2, \quad (4)$$

where  $\text{sg}$  is the stop-gradient operator and  $\beta$  is the commitment loss weight. The losses  $\mathcal{L}_{\text{codebook}}$  and  $\mathcal{L}_{\text{commit}}$  update the entries of the codebook  $\mathcal{C}$  during the training procedure. In addition, we introduce a novel loss term  $\mathcal{L}_{\text{lin}}$ , described in Section 4.2, which imposes a precise algebraic structure on the latent space, facilitating the task of source separation.

### 3.2. Latent autoregressive priors

After the VQ-VAE is trained, time domain data  $\mathbf{x} \sim p^{\text{data}}$  can be mapped to latent sequences  $\mathbf{z}$ . Autoregressive priors  $p(\mathbf{z}) = p(z_1)p(z_2|z_1) \dots p(z_S|z_{S-1}, \dots, z_1)$  can then be learned over the discrete domain. In order to generate new time-domain examples, sequences of latent indices are sampled from  $p(\mathbf{z})$  via ancestral sampling and then mapped back to the time domain via the decoder of the VQ-VAE.

## 4. METHOD

The proposed algorithm is composed of two parts. A first *separation phase* in the latent domain, in which we sequentially sample from an exact posterior on discrete indices. A following *rejection sampling procedure* based on a (scaled) global posterior conditioned on the separation results, which we use to sort the proposed solutions and select the most promising one.

### 4.1. Latent Bayesian source separation

Our task is to separate a mixture signal  $\mathbf{m} = \frac{1}{2}\mathbf{x}_1 + \frac{1}{2}\mathbf{x}_2$  into  $\mathbf{x}_1 \sim p_1^{\text{data}}$  and  $\mathbf{x}_2 \sim p_2^{\text{data}}$ , where  $p_1^{\text{data}}$  and  $p_2^{\text{data}}$  represent the distributions of each instrument class in the time domain. In a Bayesian framework, a candidate solution  $\mathbf{x} = \mathbf{x}_1, \mathbf{x}_2$  is distributed according to the posterior  $p(\mathbf{x}_1, \mathbf{x}_2 | \mathbf{m}) \propto p_1^{\text{model}}(\mathbf{x}_1)p_2^{\text{model}}(\mathbf{x}_2)p(\mathbf{m} | \mathbf{x}_1, \mathbf{x}_2)$ , where the priors  $p_1^{\text{model}}, p_2^{\text{model}}$  are typically deep generative models and the likelihood  $p(\mathbf{m} | \mathbf{x}_1, \mathbf{x}_2)$  is parameterized as  $p(\mathbf{m} | \frac{1}{2}\mathbf{x}_1 + \frac{1}{2}\mathbf{x}_2)$ .

In this work, we follow the Bayesian approach but we work in the latent domain. After training the VQ-VAE on an *arbitrary* audio dataset (with samples lying also outside  $p_1^{\text{data}}$  and  $p_2^{\text{data}}$ ), we learn two latent autoregressive priors  $p_1(\mathbf{z}_1)$  and  $p_2(\mathbf{z}_2)$  over the two instrument classes. The priors do not require any correspondence between the sources, being trained in a completely unsupervised setting. We assume the two priors to be independent, i.e.  $p(\mathbf{z}) = p(\mathbf{z}_1, \mathbf{z}_2) = p_1(\mathbf{z}_1)p_2(\mathbf{z}_2)$ . Therefore, for each step  $s \in [S]$ , we can compute the posterior distribution  $p(z_{1,s}, z_{2,s} | \mathbf{z}_{1:s-1}, \mathbf{y}) \propto p_1(z_{1,s} | \mathbf{z}_{1,1:s-1})p_2(z_{2,s} | \mathbf{z}_{2,1:s-1})p(\mathbf{y} | z_{1,s}, z_{2,s}, \mathbf{z}_{1:s-1})$ .

The random variable  $\mathbf{y} = f(\mathbf{m})$  is a function of the mixture  $\mathbf{m}$ . One can choose to model  $\mathbf{y}$  in multiple ways; a naive approach is to choose  $f$  as the identity and set  $\mathbf{y} = \mathbf{m}$ , thus computing the likelihood function directly in the time domain. This approach, however, requires the decoding of at least  $2K$  possible latent indices in order to locally compare the mixture  $\mathbf{m}$  with the hypotheses  $z_{1,s}$  and  $z_{2,s}$ . Note that this corresponds to a lower bound, given that the convolutional nature of the decoder requires a larger past context to produce meaningful results. Differently, we propose to define  $\mathbf{y}$  in the latent domain by setting  $\mathbf{y} = B_Q(E(\mathbf{m})) := \mathbf{m}_{\text{latent}}$ . This approach is preferable since it does not require decod-

ing the hypotheses at each step  $s$ , resulting in lower memory usage and computation time.

Our method benefits from the choice of operating in the latent space, thanks to the relatively small size of both the priors and the likelihood function domain (we choose  $K = 2048$ , as in [7]). In addition, by exploiting the Transformer architecture, the prior distributions can be computed in parallel. For these reasons, evaluating and sampling from  $p(z_{1,s}, z_{2,s} | \mathbf{z}_{1:s-1}, \mathbf{y})$  at each  $s$  is computationally feasible and has  $O(K^2)$  memory complexity.

### 4.2. Latent likelihood via LQ-VAE

In this section we describe how we model the likelihood function and introduce the LQ-VAE model. Following [21] we chose a  $\sigma$ -isotropic Gaussian likelihood, setting:

$$\begin{aligned} p(\mathbf{m}_{\text{latent}} | z_{1,s}, z_{2,s}, \mathbf{z}_{1:s-1}) &= \\ p(\mathbf{m}_{\text{latent},s} | z_1, z_2) &= \\ \mathcal{N}(\mathbf{m}_{\text{latent},s} | B_Q(\frac{1}{2}\mathbf{e}_{z_1} + \frac{1}{2}\mathbf{e}_{z_2}), \sigma^2\mathbf{I}). \end{aligned} \quad (5)$$

The hyper-parameter  $\sigma$  balances the trade-off between the likelihood and the priors. Lower values promote the likelihood: the separated tracks combine perfectly with  $\mathbf{m}$ , but may not sound like the instrument of the class they belong to. Instead, higher values of  $\sigma$  give importance to the priors: the separated tracks contain only sounds from the corresponding source distribution, but may not mix back to  $\mathbf{m}$  (not resembling the sources). The logarithm of the likelihood is:

$$-\frac{1}{\sigma^2} \|\mathbf{m}_{\text{latent},s} - B_Q(\frac{1}{2}\mathbf{e}_{z_1} + \frac{1}{2}\mathbf{e}_{z_2})\|_2^2. \quad (6)$$

At each step  $s$ , we compare a variable term  $\mathbf{m}_{\text{latent},s}$  with a constant matrix  $B_Q(\frac{1}{2}\mathbf{e}_{z_1} + \frac{1}{2}\mathbf{e}_{z_2})$  representing all possible (scaled) sums over all codes in  $\mathcal{C}$ . This term can be precomputed once and then reused during inference, saving additional computational resources.

We observed that performing separation with the likelihood in Eq. (5) using a VQ-VAE trained with the loss in Eq. (1), results in disturbed and noisy outcomes. Such behavior is expected because the standard VQ-VAE does not impose any algebraic structure on the discrete domain; therefore, summing codes as in Eq. (5) does not lead to meaningful results. This problem can be lifted by enforcing a post-quantization linearization loss on the VQ-VAE:

$$\mathcal{L} = \mathcal{L}_{\text{VQ-VAE}} + \mathcal{L}_{\text{lin}}, \quad (7)$$

where  $\mathcal{L}_{\text{VQ-VAE}}$  is defined as in Eq. (1) and

$$\mathcal{L}_{\text{lin}} = \frac{1}{T} \sum_t \|LQ_t - QL_t\|_2^2 \quad (8)$$

$$QL_t = B_Q(\frac{1}{2}B_Q(E(\mathbf{x}_{1,t})) + \frac{1}{2}B_Q(E(\mathbf{x}_{2,t}))) \quad (9)$$

$$LQ_t = B_Q(E(\frac{1}{2}\mathbf{x}_{1,t} + \frac{1}{2}\mathbf{x}_{2,t})). \quad (10)$$

Model	Slakh Drums	Slakh Bass
<b>Our (rejection)</b>	3.73	3.71
<b>Our (best)</b>	<b>6.40</b>	<b>6.38</b>
Demucs [19]	5.13	5.50
Tasnet [22]	5.10	5.49
<b>Our (compressed, rejection)</b>	3.91	3.73
<b>Our (compressed, best)</b>	6.87	6.48

**Table 1:** SDR scores evaluated on different models. The *compressed* attribute indicates that the ground truth tracks are first passed through the LQ-VAE before computing the SDR. The *rejection* attribute indicates that the solutions were obtained by the rejection sampling procedure (using the marginals of the posterior), while *best* indicates that the metrics are relative to the best solution in each batch.


Minimizing this loss pushes the quantized latent code representing a mixture of two arbitrary source signals ( $LQ_t$  term) to be equal to the sum of the quantized latent codes, corresponding to the singles sources ( $QL_t$  term), therefore enforcing the discrete codes to behave in an approximately linear way. We shall refer to the VQ-VAE trained as above, as a *Linearly Quantized Variational Autoencoder* (LQ-VAE).

### 4.3. Rejection sampling

Given the low memory requirements of our method, at inference time we can sample in parallel multiple solutions  $\{\mathbf{z}^{(b)}\}_{b=1}^B$  in the same batch. Autoregressive models tend to accumulate errors over the course of ancestral sampling, therefore the quality of the solutions varies across the batch. In order to select a solution, we look at the posterior  $p_{\text{rej}}(\mathbf{z}|\mathbf{m}) \propto p_{\text{rej},1}(\mathbf{z}_1)p_{\text{rej},2}(\mathbf{z}_2)p_{\text{rej}}(\mathbf{m}|\mathbf{z})$ , conditioned by the sampling event. We obtain the priors  $p_{\text{rej},1}$  and  $p_{\text{rej},2}$  by normalizing  $p_1$  and  $p_2$  over the batch. For numerical stability, we scale their logits by the length of the latent sequences  $S$ . The likelihood function  $p_{\text{rej}}(\mathbf{z}|\mathbf{m}) = \mathcal{N}\left(\mathbf{m}|\frac{1}{2}D(\mathbf{z}_1) + \frac{1}{2}D(\mathbf{z}_2), \sigma_{\text{rej}}^2\mathbf{I}\right)$  is computed directly in the time domain, with the decoding pass being executed only once at the end of the sampling procedure. The hyperparameter  $\sigma_{\text{rej}}$  plays a similar role to the  $\sigma$  used in Eq. (5). We can balance the likelihood and the priors by setting:

$$\mathbb{E}_b\left[\log p_{\text{rej}}(\mathbf{z}^{(b)})\right] = -\frac{1}{\sigma_{\text{rej}}^2}\mathbb{E}_b\left[\left\|\mathbf{m} - \frac{1}{2}(D(\mathbf{z}_1^{(b)}) + D(\mathbf{z}_2^{(b)}))\right\|_2^2\right]$$

and solving for  $\sigma_{\text{rej}}$ . The selected solution is the one that maximizes the marginals of  $p_{\text{rej}}(\mathbf{z}|\mathbf{m})$ . In our experiments, we noticed that this choice yields better results than the maximum a-posteriori estimate ( $\approx 5\%$  improvement).

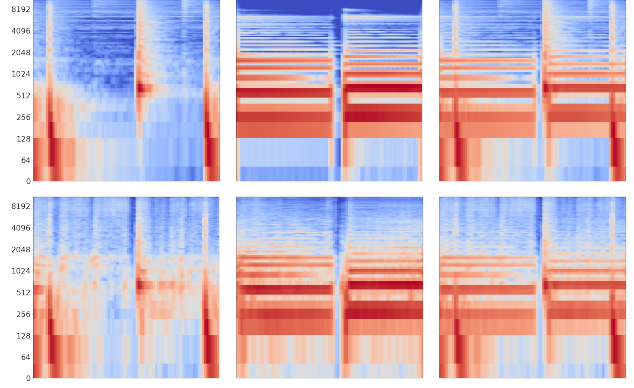

**Fig. 1:** Mel spectrograms in log scale of a separation result (bottom row) and the relative ground truth signals (top row). Left: drums source. Center: bass source. Right: mixture.

## 5. RESULTS

We validate our approach on *Slakh2100* [1], a large musical source dataset containing mixed tracks separated into 34 instrument categories. We select tracks from the ‘drum’ and ‘bass’ classes coming from the training and test splits, sub-sampled at a frequency of 22kHz. We train the convolutional LQ-VAE over mixtures obtained by randomly mixing sources from  $\sim 150$  individual tracks. The LQ-VAE has a downsampling factor of  $\frac{T}{S} = 64$  and uses a dictionary of  $K = 2048$  latent codes. After training the LQ-VAE, we train two autoregressive models on drum and bass latent codes extracted from  $\sim 1200$  tracks each. In order to avoid any bias and prevent overfitting, we select a larger split, disjoint from the one used to train the LQ-VAE. The models are based on a deep scalable Transformer architecture as in [7]. We fixed  $\sigma = 0.4$  in all our separation experiments.

In Table 1 we compare our method with two state-of-the-art supervised approaches. To this end, we iterate on the validation split of [1] made up of 249 different songs, and for each we separate 3 random chunks, each of 3 seconds. In Figure 1 we show a qualitative result of our algorithm. All our experiments are performed on a Nvidia Tesla V100 GPU with 32 GB of VRAM. With this GPU our method can sample a batch of 256 candidate solutions (128 for each instrument) simultaneously. Interestingly, even if solutions selected by the rejection sampling algorithm have slightly lower metrics than supervised approaches, by individually selecting the best solution for each instrument we achieve SOTA performance. This testifies the quality of our separation.

Remarkably, our method employs 3 minutes on average for sampling a track of 3 seconds, compared to the more than 100 minutes of [4].

## 6. CONCLUSIONS

In this work, we introduced a simple algorithm to perform exact Bayesian inference in the discrete latent domain. Our method allows to achieve good separation results while being much faster than other likelihood-based unsupervised approaches.

The main bottleneck of our method lies in the rejection sampling strategy. Future work will attempt to improve this aspect by investigating the design of more accurate learning-based rejection samplers. Other benefits could come from the adoption of multi-level VQ-VAEs [7] or by leveraging deeper autoregressive priors.

## 7. REFERENCES

- [1] Ethan Manilow, Gordon Wichern, Prem Seetharaman, and Jonathan Le Roux, “Cutting music source separation some Slakh: A dataset to study the impact of training data quality and quantity,” in *Proc. IEEE Workshop on Applications of Signal Processing to Audio and Acoustics (WASPAA)*. IEEE, 2019.
- [2] Hugo Larochelle and Iain Murray, “The neural autoregressive distribution estimator,” in *Proceedings of the Fourteenth International Conference on Artificial Intelligence and Statistics*, 2011, Proceedings of Machine Learning Research.
- [3] Aaron van den Oord, Sander Dieleman, Heiga Zen, Karen Simonyan, Oriol Vinyals, Alex Graves, Nal Kalchbrenner, Andrew Senior, and Koray Kavukcuoglu, “Wavenet: A generative model for raw audio,” 2016.
- [4] Vivek Jayaram and John Thickstun, “Parallel and flexible sampling from autoregressive models via langevin dynamics,” 2021.
- [5] Aäron van den Oord, Oriol Vinyals, and Koray Kavukcuoglu, “Neural discrete representation learning,” in *Advances in Neural Information Processing Systems 30: Annual Conference on Neural Information Processing Systems 2017, December 4-9, 2017, Long Beach, CA, USA*, 2017.
- [6] Ali Razavi, Aäron van den Oord, and Oriol Vinyals, “Generating diverse high-fidelity images with VQ-VAE-2,” in *Advances in Neural Information Processing Systems 32: Annual Conference on Neural Information Processing Systems 2019, NeurIPS 2019, December 8-14, 2019, Vancouver, BC, Canada*, 2019.
- [7] Prafulla Dhariwal, Heewoo Jun, Christine Payne, Jong Wook Kim, Alec Radford, and Ilya Sutskever, “Jukebox: A generative model for music,” 2020.
- [8] Pierre Comon, “Independent Component Analysis, a new concept?,” *Signal Processing*, 1994.
- [9] P. Smaragdis, C. Févotte, G. J. Mysore, N. Mohammadiha, and M. Hoffman, “Static and dynamic source separation using nonnegative factorizations: A unified view,” *IEEE Signal Processing Magazine*, , no. 3, 2014.
- [10] Sam T. Roweis, “One microphone source separation,” in *Advances in Neural Information Processing Systems 13, Papers from Neural Information Processing Systems (NIPS) 2000, Denver, CO, USA*, 2000.
- [11] Stefan Uhlich, Franck Giron, and Yuki Mitsufuji, “Deep neural network based instrument extraction from music,” in *2015 IEEE International Conference on Acoustics, Speech and Signal Processing, ICASSP 2015, South Brisbane, Queensland, Australia, April 19-24, 2015*, 2015.
- [12] Stefan Uhlich, Marcello Porcu, Franck Giron, Michael Enenkl, Thomas Kemp, Naoya Takahashi, and Yuki Mitsufuji, “Improving music source separation based on deep neural networks through data augmentation and network blending,” in *2017 IEEE International Conference on Acoustics, Speech and Signal Processing, ICASSP 2017, New Orleans, LA, USA, March 5-9, 2017*, 2017.
- [13] Jen-Yu Liu and Yi-Hsuan Yang, “Denoising auto-encoder with recurrent skip connections and residual regression for music source separation,” 2018.
- [14] Naoya Takahashi an, “Mmdenselstm: An efficient combination of convolutional and recurrent,” *ArXiv preprint*, 2018.
- [15] Woosung Choi, Minseok Kim, Jaehwa Chung, and Soonyoung Jung, “Lasaft: Latent source attentive frequency transformation for conditioned source separation,” 2020.
- [16] Naoya Takahashi and Yuki Mitsufuji, “D3net: Densely connected multidilated densenet for music source separation,” 2020.
- [17] Zafar Rafii, Antoine Liutkus, Fabian-Robert Stöter, Stylianos Ioannis Mimilakis, and Rachel Bittner, “The MUSDB18 corpus for music separation,” 2017.
- [18] Gabriel Meseguer-Brocal and Geoffroy Peeters, “Conditioned-U-Net: Introducing a Control Mechanism in the U-Net for Multiple Source Separations,” *arXiv:1907.01277 [cs, eess]*, 2019, arXiv: 1907.01277.
- [19] Alexandre Défossez, Nicolas Usunier, Léon Bottou, and Francis Bach, “Music Source Separation in the Waveform Domain,” *arXiv:1911.13254 [cs, eess, stat]*, 2019, arXiv: 1911.13254.

- [20] Vivek Narayanaswamy, Jayaraman J. Thiagarajan, Rushil Anirudh, and Andreas Spanias, “Unsupervised audio source separation using generative priors,” 2020.
- [21] Vivek Jayaram and John Thickstun, “Source separation with deep generative priors,” in *Proceedings of the 37th International Conference on Machine Learning, ICML 2020, 13-18 July 2020, Virtual Event*, 2020, Proceedings of Machine Learning Research.
- [22] Yi Luo an, “Tasnet: Surpassing ideal time-frequency masking for speech separation,” *ArXiv preprint*, 2018.